


# Compact ejectors

## Connections SBUS

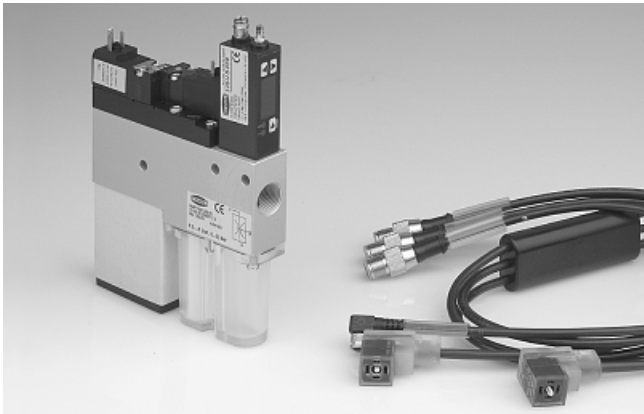

Connectors and cables SBUS

### Our highlights...

- Cable set with integrated air-saving function
- Prefabricated cable sets in various versions

### Your advantages...

- > Prefabricated air-saving function with potential isolation
- > Quick connection of ejector valves and vacuum switches with M12 plugs

### Applications

- Connection of ejectors via M12 plugs to various components such as M12 distribution boxes or field-bus modules

### Construction

- 4-pin M12 plug on the machine side
- 4-pin M8 sockets and valve connectors on the ejector side
- Cable sets with PUR sheath
- Cable set with air-saving function and potential isolation between vacuum switch and regulator with valve actuator



### Suitability for branch-specific applications

# Compact ejectors

## Connections SBUS



### Ordering data Connections SBUS

Designation	Article. No.	Technical Description
Air-saving function for NO ejectors, with 3 x M12 male connectors and potential isolation	10.02.02.01292	Air-saving function for all NO ejectors with shape C valve connectors (DIN 43650), potential isolation between inputs and outputs, 3 x 4-pin male M12 connectors, length approx. 0.8 m, PUR sheath
Connection cable, M8 to M12	21.04.05.00052	4-pin female M8 connector, angled, to 4-pin male M12 connector, length 0.6 m, PUR sheath
Connection cable, valve shape C to M12	21.04.05.00053	Valve connector shape C (DIN 43650) to 4-pin male M12 connector, LED indicator, varistor protection, length 0.6 m, PUR sheath
Connection cable, 2 valves shape C to M12	21.04.05.00054	2 x valve connector shape C (DIN 43650) to 4-pin male M12 connector, LED indicator, varistor protection, length 0.6 m, PUR sheath
Connection cable, M8, 5 m	10.06.02.00032	4-pin female M8 connector, angled, other end of cable open, length 5 m, PUR sheath
Connection cable, valve shape C, 2 m	21.04.05.00055	Valve connector shape C (DIN 43650), other end open, LED indicator, varistor protection, length 2 m, PUR sheath
Connection cable, valves, for SCP 10/15 and SCPM series	21.04.06.00086	Valve connector for SCP 10/15 and SCPM ejectors, other end of cable open, length 3 m, PVC sheath
Y-splitter, 2 x M12 to 1 x M12	21.04.05.00056	2 x female M12 connector to 1 x male M12 connector (for example, for connecting two sensors via one M12 connector)
Male connector M12 with IDC terminals	21.04.05.00057	4-pin male M12 connector, IDC terminals, with pull relief, 22 mm sealing ring
Male connector M12 with screw terminals	21.04.05.00058	4-pin male M12 connector, screw terminals, with pull relief, PG7 cable gland